
1.

Figure 2 shows a supermarket trolley.

Figure 2

Moments - 2

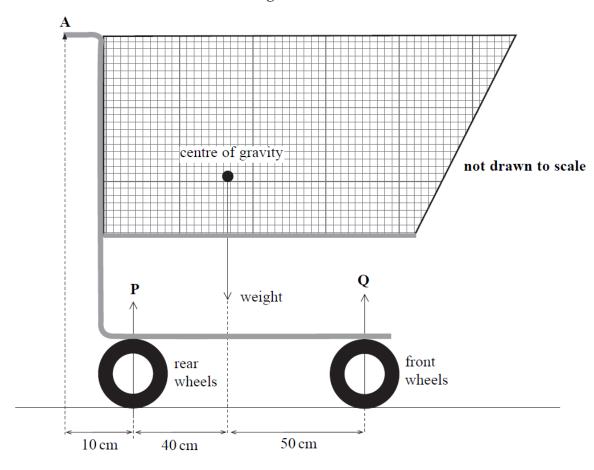

The weight of the trolley and its contents is 160 N.

(a)	Explain what is meant by centre of gravity.

(2 marks)


Calculate the minimum force that needs to be applied vertically at A to lift the frowheels off the ground.		
Calculate the minimum force that needs to be applied vertically at A to lift the frowheels off the ground. (2 n State and explain, without calculation, how the minimum force that needs to be appeared by the control of the ground compares to the force you calculate the minimum force that needs to be appeared by the control of the ground compares to the force you calculate the minimum force that needs to be appeared by the control of the ground compares to the force you calculate the minimum force that needs to be appeared by the control of the ground compares to the force you calculate the minimum force that needs to be appeared by the ground compares to the force you calculate the ground compares to the ground	(i)	force P ,
Calculate the minimum force that needs to be applied vertically at A to lift the frowheels off the ground. (2 n State and explain, without calculation, how the minimum force that needs to be appeared by the compares to the force you calculate part (c).		
Calculate the minimum force that needs to be applied vertically at A to lift the frowheels off the ground. (2 n State and explain, without calculation, how the minimum force that needs to be appeared by the compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the ground com		
Calculate the minimum force that needs to be applied vertically at A to lift the frowheels off the ground. (2 n State and explain, without calculation, how the minimum force that needs to be appeared by the compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the part (c).		
Calculate the minimum force that needs to be applied vertically at A to lift the frowheels off the ground. (2 n State and explain, without calculation, how the minimum force that needs to be appeared by the compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the minimum force that needs to be applied vertically at A to lift the rear wheels off the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the force you calculate the properties of the ground compares to the ground com	(ii)	force Q .
Calculate the minimum force that needs to be applied vertically at A to lift the frowheels off the ground. (2 n State and explain, without calculation, how the minimum force that needs to be apprecially at A to lift the rear wheels off the ground compares to the force you calculation part (c).		
Calculate the minimum force that needs to be applied vertically at A to lift the frowheels off the ground. (2 n State and explain, without calculation, how the minimum force that needs to be apprecially at A to lift the rear wheels off the ground compares to the force you calculation part (c).		
wheels off the ground. (2 n State and explain, without calculation, how the minimum force that needs to be appreciably at A to lift the rear wheels off the ground compares to the force you calcin part (c).		(3 mar
State and explain, without calculation, how the minimum force that needs to be apprecially at A to lift the rear wheels off the ground compares to the force you calculate part (c).		
State and explain, without calculation, how the minimum force that needs to be apprecially at A to lift the rear wheels off the ground compares to the force you calculate part (c).		(2 mar
vertically at A to lift the rear wheels off the ground compares to the force you calc in part (c).	C4-4-	
You may be awarded marks for the quality of written communication in your answ		
	vertic	ally at ${f A}$ to lift the rear wheels off the ground compares to the force you calculate
	vertic in par	ally at ${f A}$ to lift the rear wheels off the ground compares to the force you calculat (c).
	vertic in par	ally at ${f A}$ to lift the rear wheels off the ground compares to the force you calculate (c).
	vertic in par	ally at ${f A}$ to lift the rear wheels off the ground compares to the force you calculat (c).
	vertic in par	ally at ${f A}$ to lift the rear wheels off the ground compares to the force you calculat (c).
(3 n	vertic in par	ally at ${f A}$ to lift the rear wheels off the ground compares to the force you calculat (c).

(b) ${\bf P}$ and ${\bf Q}$ are the resultant forces that the ground exerts on the rear wheels and front

2.

Heavy duty coil springs are used in vehicle suspensions. The pick-up truck shown in **Figure 2** has a weight of 14 000 N and length of 4.5 m. When carrying no load, the centre of mass is 2.0 m from the rear end. The part of the vehicle shown shaded in grey is supported by four identical springs, one near each wheel.

Figure 2

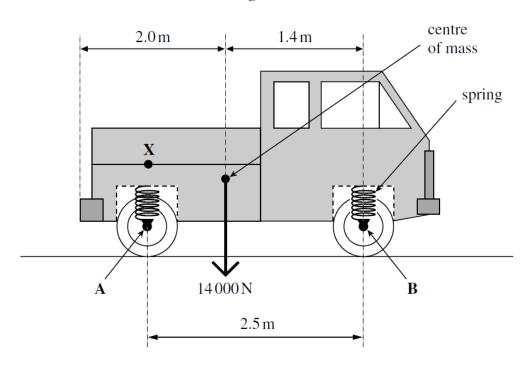


(a)	(i)	Define the moment of a force about a point.
		(2 marks
(a)	(ii)	State and explain which pair of springs, front or rear, will be compressed the most.
		(2 marks

(a)	(iii)	By taking moments about axle B , calculate the force exerted on the truck by each rear spring.
		answer =
(b)	The	spring constant for each of these springs is $100000\mathrm{Nm^{-1}}$.
(b)		
		ulate the distance that each of these rear springs is compressed by this vehicle as on in Figure 2 .
		answer = m (2 marks)
(c)	the n	springs must not be compressed by more than an additional 0.065 m. Calculate naximum load that could be placed at point X , which is directly above the centre e rear axle A , as shown in Figure 2 .
		answer = N

(a)

Figure 1 shows a motorcycle and rider. The motorcycle is in contact with the road at A and B.

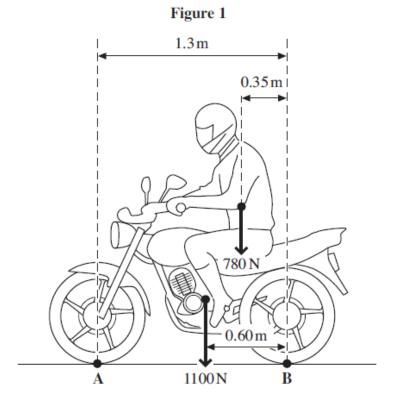

The motorcycle has a weight of $1100\,\mbox{N}$ and the rider's weight is $780\,\mbox{N}$.

State the Principle of Moments.

(2 mark	s)
Calculate the moment of the rider's weight about B. Give an appropriate unit.	
answer =	
(2 mark	3)

(c)	By taking the moments about B, calculate the vertical force that the road exerts on the front tyre at A. State your answer to an appropriate number of significant figures.
	answer =
(d)	Calculate the vertical force that the road exerts on the rear tyre at B.
	$answer = \dots N$ $(1 mark)$
(e)	The maximum power of the motorcycle is $7.5\mathrm{kW}$ and it has a maximum speed of $26~\mathrm{ms^{-1}}$, when travelling on a level road.
	Calculate the total horizontal resistive force for this speed.
	$answer = \dots N$ (2 marks)

a)	(i)	Define the moment of a force.
		[1]
	(ii)	State the principle of moments.

(b) Fig. 5.1 shows a pillar (lying horizontally) made of two uniform sections X and Y each of cross-sectional area 3.5 x 10⁻² m². The sections are made from two different materials. The weights of X and Y are shown acting through the centre of gravity of each section.

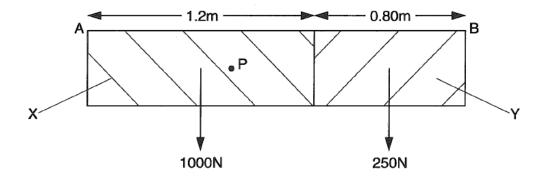


Fig. 5.1

Show that the average density of the pillar is about 1800 kg m⁻³.

[3]

(i) Show, using the principle of moments, that the point P is 1.2 m from the end B.

(c) The pillar in (b) will balance horizontally when supported vertically below the point P.

(ii) State the significance of the point P.

(ii) State the significance of the point P.[1]

(i)	Explain what the centre of gravity of a body means.
(ii)	Define moment of a force about a point.
	(i) (ii)

(b) Fig. 2.1 shows an arrangement used to determine the approximate centre of gravity of a man. A uniform plank, of mass of 5.0 kg and length 2.00 m, is supported on a pivot at one end A while the other end B is supported on scales. The man lies horizontally on the plank with his feet level with end A. The man is 1.80 m tall and has a mass of 75 kg. The scales read 44 kg.

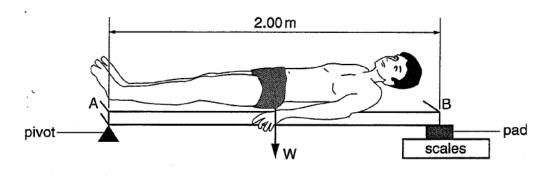


Fig. 2.1

The weight W, of the plank is shown.

- (i) On Fig. 2.1 draw and label three other forces acting on the plank.
- (ii) Use the principle of moments to calculate the distance of the centre of gravity of the man from end A.

[3]

1.	
2.	
۷.	
	[2

(b) Fig. 2.1 shows a painter's plank resting on two supports A and B.

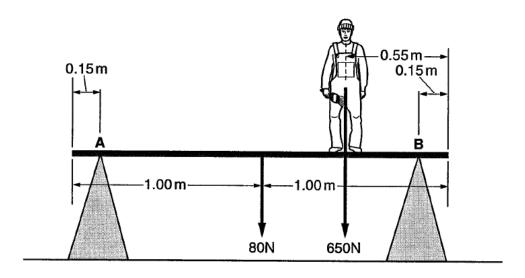


Fig. 2.1

The plank is uniform, has a weight 80 N and length 2.00 m. A painter of weight 650 N stands 0.55 m from one end.

(i) Show that the force acting on the plank at the support **B** is approximately 540 N by taking moments of all the forces about the support at **A**.

[3]

(ii) Calculate the force acting on the plank at support A.

force at A = N [2]

(iii)	D pa	escribe and explain what ainter moves towards the	t happens to support at A .	the forces Quantitati	on the player on the player of	ank at A and B if the are not required.
				•••••		
			••••••			
				•••••		
				••••••	•••••	
				······		[3]
7. (a) (i)	Define <i>pressure</i> .				
(u) (.•/					
						[1]
(i	ii)	Define moment of a force.				
				•••••		[1]
(b) F	ig.	3.1 shows a device used fo				
-	-	380 mm		1	20 mm— ▶	
						Н
		lever arm				plunger
F = 20	N					- plunger
						crushed material
			-sectional area x 10 ⁻³ m²			- cylinder

Fig. 3.1

A vertical force *F* of 20 N is applied at one end of a lever system. The lever is pivoted about a hinge **H**. The plunger compresses the material in the cylinder.

(i) Two forces acting on the lever arm are its weight and the force *F*. On Fig. 3.1, draw and label **two** other forces acting on the lever arm. [2]

	(ii) By taking moments about H , show that the force acting on the plunger is 83 N. The weight of the lever arm may be neglected.
(c)	(i)	[2] The cross-sectional area of the plunger is $4.0 \times 10^{-3} \text{m}^2$. Calculate the pressure exerted by the plunger on the material in the cylinder.
	(ii)	pressure = Pa [2] State two methods of increasing the pressure exerted by the plunger.
		[2]